


ALLEGRI

BY KALCO LIGHTING

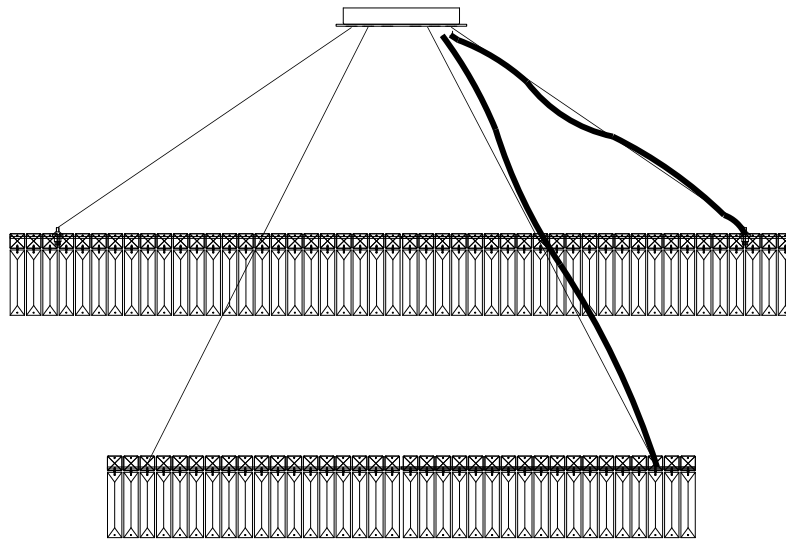

MODEL 11779

ASSEMBLY AND DRESSING INSTRUCTIONS

Blending innovative design, cutting-edge technology and the grace and elegance of traditional crystal, ALLEGRI® proudly brings you a new approach to lighting. ALLEGRI® fixtures are made from the finest raw materials and are brought to life through a combination of traditional manufacturing, such as sand casting, hand-forging and technology driven techniques including laser cutting.

Enclosed are detailed instructions on how to properly install your fixture. Please read all instructions carefully. If you need further assistance, please contact the dealer from which you purchased this product or call 866-820-2665 to speak with an ALLEGRI® customer service representative. We hope you enjoy your fixture!

ALLEGRI

BY KALCO LIGHTING

ASSEMBLY AND DRESSING INSTRUCTIONS

WARNING! **CONTENTS ARE FRAGILE** **HANDLE WITH CARE**

THE METAL FRAME, FINISH AND CRYSTAL COMPONENTS OF THIS CHANDELIER ARE VERY DELICATE.
PLEASE EXERCISE EXTREME CAUTION DURING UNPACKING AND INSTALLATION.

PLACE ALL PIECES TOGETHER IN A NUMERICAL ORDER AND IN THE ORIENTATION DEPICTED.
REFER TO THE PARTS LIST TO AVOID ANY CONFUSION BETWEEN PARTS THE PARTS NUMBER MUST COINCIDE.

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY AND PROPERTY DAMAGE. All electrical components must be installed only by a Licensed Electrician. This product must be installed in accordance with the National Electric Code (NEC), and appropriate local electrical code(s), by a person familiar with the construction and operation of the product and the hazard involved.*

CAUTION: Do not exceed maximum wattage note on fixture. Uses only recommended bulbs with fixture.

GENERAL NOTES

- ❖ For your safety and proper operation of fixture, read and understand all instructions completely before commencing installation.
- ❖ This fixture is suited for dry locations. Never install fixture on damp ceiling; room should be dry and well ventilated.
- ❖ Extreme care should be taken to avoid damage to the surface of lighting fixture and wires. Wearing gloves is recommended for installation.
- ❖ Connect ribbed wire of lighting fixture to live wire, while smooth wire of lighting to neutral. Connect bare copper or silver color ground wire of fixture to the double colored or green wire of outlet box.
- ❖ Use UL LISTED wire nuts for the wiring connections in this fixture. Wrap wire nut connections with UL LISTED electrical tape.
- ❖ Keep lighting away from acid, alkali and other corrosive chemical or gas; clean the fixture with a clean cloth only.
- ❖ Fixture must be firmly secured when installing ceiling tube, chain pipe and other connecting parts.
- ❖ Never cover the lighting fixture when power is connected.
- ❖ Disconnect the power before installing, cleaning and/or replacing light bulb.
- ❖ Extreme care should be taken when installing and cleaning of Glass and/or Crystal Components.
- ❖ This product is rated 110-130V/60HZ bulb 40W Maximum.
- ❖ Save these instructions for future reference.

WARNING

The electricity must be turned off at the main fuse box or circuit breaker before installing this fixture. Turning the power off using the light switch may not be sufficient to prevent electrical shock.



*ALLEGRI will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.

ALLEGRI

BY KALCO LIGHTING

MODEL 11779-010-FR001

CANOPY MOUNTING INSTRUCTION

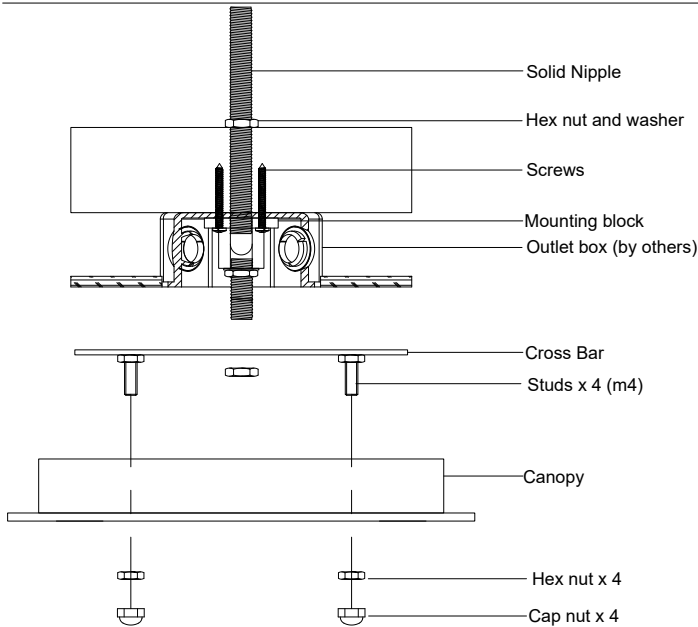

All electrical components must be installed by a licensed electrician in accordance with the National Electric code and the appropriate local electrical codes.



INSTALL CROSSBAR AS FOLLOWS:


CAUTION: Be sure power is off at the main breaker box prior to installation.

1. Drill a hole on main ceiling beam and pass Solid Nipple through.
2. Place Washer and Hex Nut on top of Solid Nipple to hold.
3. Take Outlet Box through Solid Nipple and screw in Mounting Block, then screw mounting block to beam with 4 screws for wood
4. Install CrossBar to mounting block with the 4 studs pointing towards the floor.

Canopy Side View



(A.10) CANOPY BOTTOM VIEW

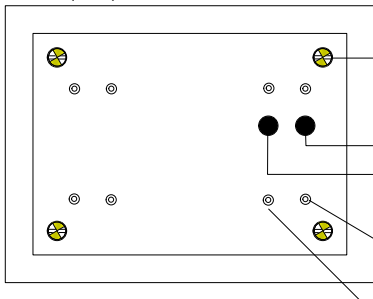

INSTALL CANOPY AS FOLLOWS:


1. NOTE: This fixture is made of 2 Tiers (levels). Therefore each level is numbered with following codes from top to bottom:
Tier 1: Code 11831
Tier 1: Code 11707
2. Each tier frame and crystal set is packed in an individual box and are labeled with their corresponding code. DO NOT MIX CRYSTAL SETS on tiers since crystal sizes and quantities are different for each tier.
3. Identify each Tier on page 5 and carefully unpack frames, then lay them down on a clean working blanket on the floor (place smaller tiers inside larger ones) release all cables and wires to match with canopy
4. Find and unwrap Canopy Set. pass all cables through corresponding holes in canopy according to diagram (A.10) to the left
5. ADJUST CABLES: All cables can be adjusted for more length as desired or for more separation between tiers. Press down the tip of the '6-cable glider' in top of frames while pushing or pulling cable, release and cable will lock itself. (Will adjust max up to 8 feet length)
Install safety blocks to each cable inside canopy after desired lengths are set. (See image A.11, page 5)

ALLEGRI

BY KALCO LIGHTING

WIRE CONNECTIONS:


MODEL 11779-010-FR001

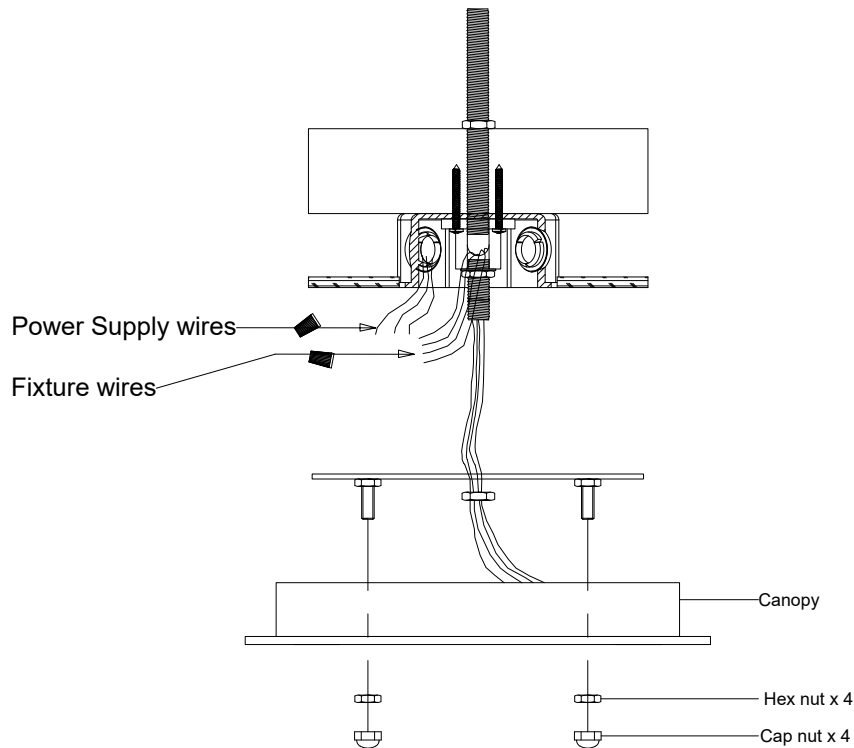

WIRING INSTRUCTIONS:

1-Identifying fixtures wires:

Each Tier comes with one 3 core clear silver wire type. Neutral, Live and Ground wires are encased into a round clear insulation sleeve. See image below:

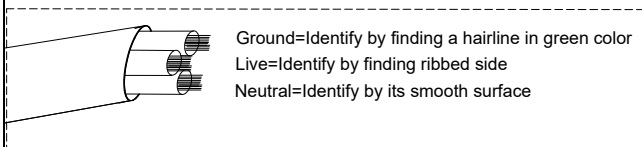

2-Make connections as follows:

Connect fixture Ground Wire to Home Green Ground Wire,

Connect fixture Live wire to power supply black wire

Connect fixture Neutral wire to power supply white wire.

Review wire connections and make corrections before turning the breaker on

Make sure to isolate wire connections with wire nuts and black electricians tape or as determined by your local electric code.



3-Match 4 canopy holes to 4 crossbar studs and push flat to ceiling, install chrome hexnuts and 4 capnuts, then install Candelabra bulbs to each Tier (max 40 watts ea.)

ALLEGRI



BY KALCO LIGHTING

CRYSTAL DRESSING INSTRUCTION

MODEL 11779-010-FR001

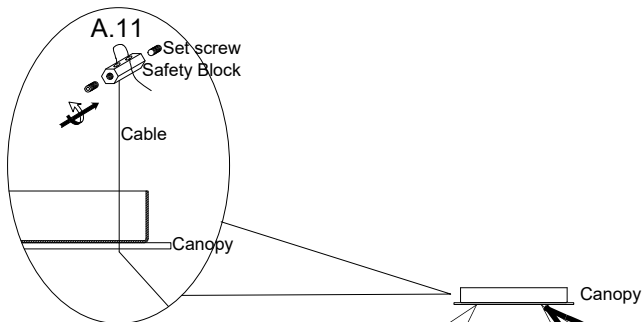

All electrical components must be installed by a licensed electrician in accordance with the National Electric code and the appropriate local electrical codes.

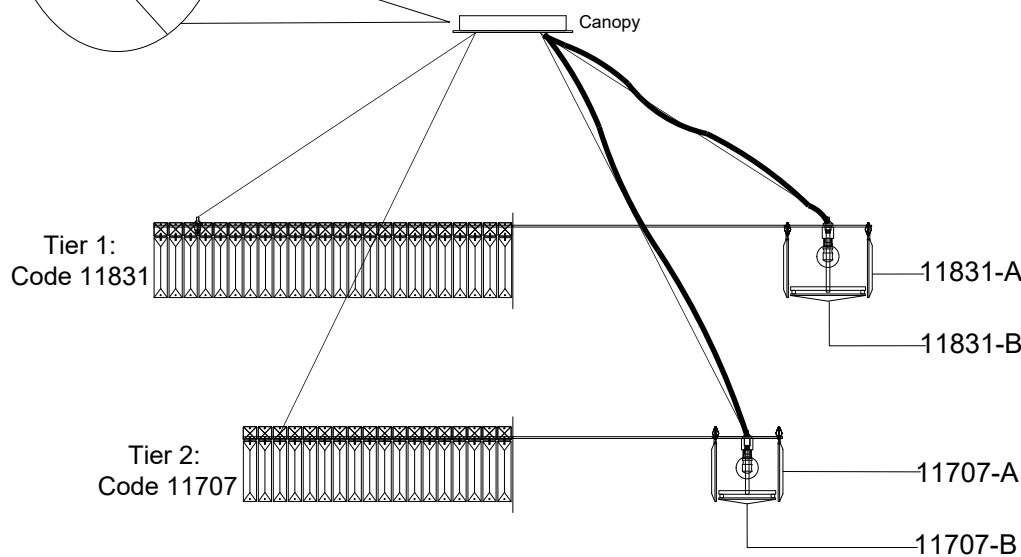

CODE	QTY
11831-A	172
11831-B	92

CODE	QTY
11707-A	172
11707-B	92

INSTRUCTIONS:


1-NOTE: Crystals 'free hung' from laser cut slot as shown in FIG.1

The two tiers bottom crystals (B) comes factory assembled
Only the inner and outer sides of fixture needs to be dressed
Crystals must be the very last step of fixture installation to avoid any breakage in case fixture is shaken by moving or adjusting cables, canopy, frames etc.

2-Use the cotton inspection gloves provided to work with crystals to avoid leaving finger print marks.

3-Dress from Bottom to Top:
Attach 172 crystal to bottom tier 11831-A inside and outside of ring.
The 92 pcs. of (B) crystals are factory assembled.

4- Attach 260 crystal to top tier 11832-A inside and outside of ring
The 92 pcs. of (B) crystals are factory assembled.






Insert crystal strand sideways to the open slot in metal band, then turn crystal 45 degrees to the left and release. The square crystal will sit right in the slot.

ALLEGRI



BY KALCO LIGHTING

CRYSTAL DRESSING INSTRUCTION

MODEL 11779-010-FR001



All electrical components must be installed by a licensed electrician in accordance with the National Electric code and the appropriate local electrical codes.

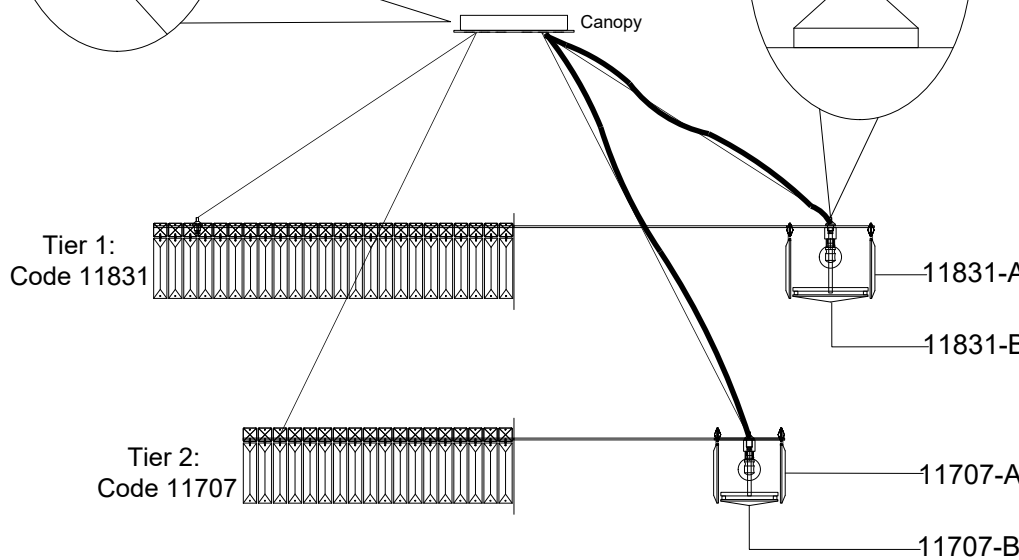

CODE	QTY
11831-A	172
11831-B	92
CODE	QTY
11707-A	172
11707-B	92

INSTRUCTIONS:


1-NOTE: Crystals 'free hung' from laser cut slot as shown in FIG.1

The two tiers bottom crystals (B) comes factory assembled
Only the inner and outer sides of fixture needs to be dressed
Crystals must be the very last step of fixture installation to avoid any breakage in case fixture is shaken by moving or adjusting cables, canopy, frames etc.

2-Use the cotton inspection gloves provided to work with crystals to avoid leaving finger print marks.

3-Dress from Bottom to Top:
Attach 172 crystal to bottom tier 11831-A inside and outside of ring.
The 92 pcs. of (B) crystals are factory assembled.

4- Attach 260 crystal to top tier 11832-A inside and outside of ring
The 92 pcs. of (B) crystals are factory assembled.



Insert crystal strand sideways to the open slot in metal band, then turn crystal 45 degrees to the left and release. The square crystal will sit right in the slot.